


REV. ^D 16/6/07 - radiator numbers and minor options
 19/6/07 - Bed 3 changed UFFH Bedroom 4 - one manifold
 bath room changed
 UFFH MAN SKETCH FF 1/6/2007

OF MEGAFLOW, BOILER AND UNDERFLOOR HEATING
 BE ALL IN ACCORDANCE WITH MECHANICAL / PLUMBING
 DETAIL DESIGN AND AS AGREED WITH ARCHITECT.

KEY
 (Rads) NF = new rads
 EX.F = existing/
 reclaimed

For duct runs see separate sketches

REVISION A
 3/6/07
 D
 17/6/07

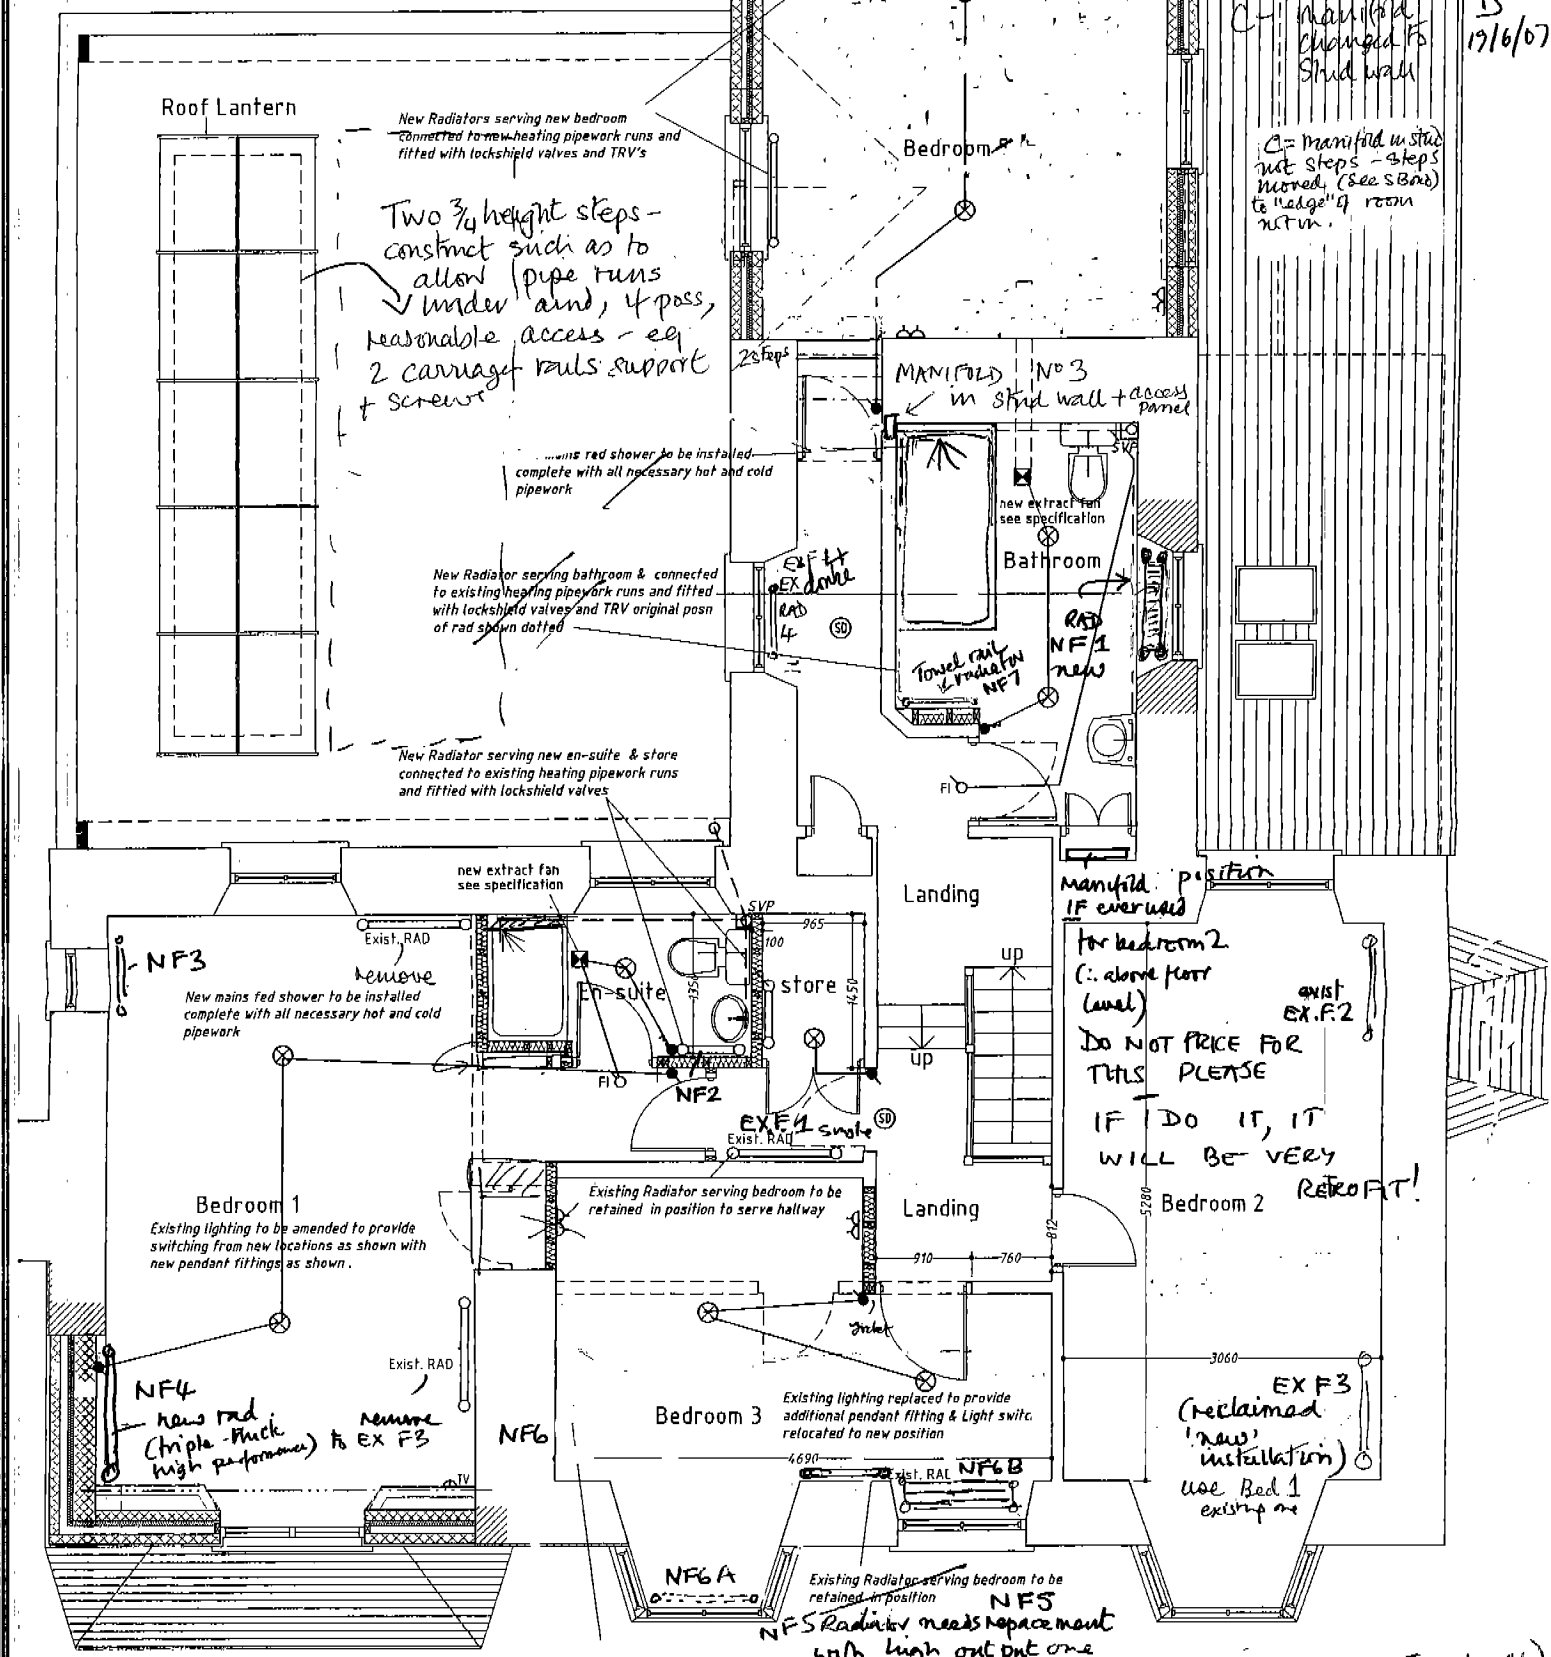

DOOR PLAN

or rooms) and W.C.'s with
 overrun. Mechanical
 ng area and 30L/sec to
 onrol for 60L/sec if
 ling mounted. Fan Manuf

HEATING
 Contractor to provide and install new Worcester Bosch Greenstar 40
 CDI conventional boiler with LPG conversion kit, programmer and flue
 with megaflow hot water storage and new radiators and pipework.
 Existing boiler to be removed and remaining supply pipework and
 radiators retained Heating system to be incorporated in to the new

ELECTRICAL
 All work to be in accordance with current IEE Regulations. All work to
 be undertaken by NICEIC approved installer. All sockets to be min.
 450mm above floor level. All switches to be not greater than 1200mm
 above floor level.
 A minimum of 1/3 of the rooms to have efficient lighting with
 luminaires that will not take more than 100Watts